

Declaration of Conformity

Date: 4-9-2018

We hereby attest that following products are made of materials intended for food contact.


Products made of		Part of the product in contact with food
Stainless Steel	X	The body and lid
Ceramic	X	The crush grinder
Plastics	X	The housing and grinder parts
Silicone	X	

Products are listed on next page.

- These products are in compliance with European regulation EC/1935/2004 of October the 27th and European regulation EC/2023/2006 of December the 22th
- These products are in compliance with regulation No 10/2011/EC for plastic materials and articles intended to come into contact with food (if made of plastic)
- These products are in compliance with Danish law BEK 822 of June the 26th 2013

Documentation of compliance with Danish law BEK 822 of June the 26th 2013 for submission of cadmium and lead can be sent on request (for parts made of glass, ceramic and porcelain)

ROSENDAHL DESIGN GROUP A/S
Slotsmarken 1
DK-2970 Hørsholm

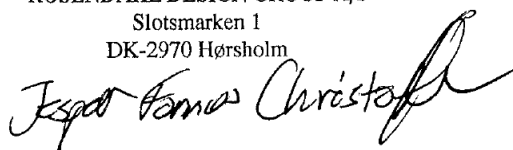




Signed by:

Rosendahl Design Group - Slotsmarken 1 – DK-2970 Hørsholm



ROSENDAHL
DESIGN GROUP

Product number	Product name	Photo
17473	GLO salt grinder	
17474	GLO pepper grinder	
17475	GLO salt & pepper grinder	

Rosendahl Design Group - Slotsmarken 1 – DK-2970 Hørsholm



ROSENDAHL
DESIGN GROUP

Product information:	Yes	No	Remarks
The Product can be used for all types of food and all types of process conditions (under normal and foreseeable condition of use):		X	
Suitable for:			If limit (to be mentioned)
Aqueous food		X	
Acidic foods		X	
Alcoholic foods		X	
Fatty foods		X	
Dry foods	X		
The oven		X	Not suitable for oven use
The microwave		X	Not suitable for the microwave
The Dishwasher		X	Not suitable for the dishwasher
Other		X	
Test/material/temperature:			
Total migration test performed	X		
Specific migration tests performed	X		
Dual use additives(plastic)	X		E470a – No restriction according to 10/2011/EC
Functional barrier (Plastic)		X	
Temperature stable at max and min temperature:	-10 °C - 50 °C		